

## Dual-channel multi-band receiver



### Description

The CatchAll-M2 is a dual-receiver, multi-band radio frequency front-end device (FED) designed for operation in the commonly used mobile radio frequency bands between 160 MHz and 4 GHz.

It is based on MAC Ltd's MON4000 software-defined receiver card and in addition to the six frequency bands supported by the MON4000 the CatchAll-M2 adds support for 160-180 MHz VHF and 300-480 MHz UHF bands. The six bands provided by the MON4000 can be chosen at time of manufacture from a wide range of available bands. Please see the MON4000 data sheet for a list of available options and contact MAC Ltd if your requirements cannot be met by these.

Digitised samples from each receiver are passed to the host processing unit as VITA-49 streams carried by gigabit Ethernet connections. The unit can be powered from a DC voltage in the range 10 V to 57 V or from a power-over-Ethernet (PoE+) IEEE 802.3at-compliant power sourcing equipment (PSE) device.


A high stability 10 MHz oscillator is provided to improve the frequency accuracy when operating without GPS. When GPS is available the 10 MHz oscillator is itself conditioned by the GPS receiver. The 10 MHz reference and GPS data signals are made available on the CatchAll-M2's front panel to allow a second, slave unit to be synchronised to the first.

### Features

- Two independent receivers
- VITA-49 output over GbE streams
- Covers all common cellular bands in the frequency range 160 to 4000 MHz
- Multi-unit synchronisation including the sharing of GPS data
- Excellent dynamic range
- Power over Ethernet or separate DC supply
- Simple ASCII-based control interface
- Many features are software defined for ease of field upgrade



## CatchAll-M2 Block Diagram

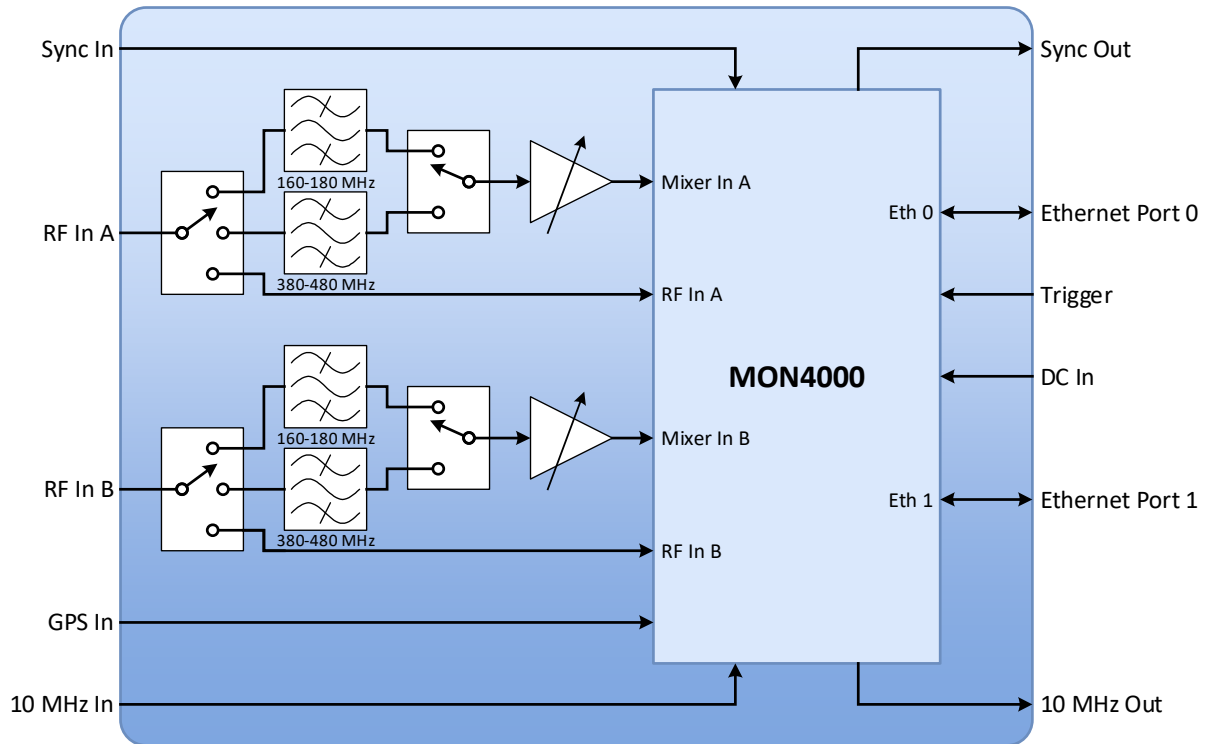

### Specification Table

Parameter	Value	Parameter	Value
Power supply	PoE+ or auxiliary DC in	Power consumption (typ)	
Aux. DC in voltage range	10 to 57 V DC	12 V DC, Idle	6 W
Frequency range (see also MON4000 datasheet)	160 to 180 MHz 380 to 480 MHz Plus 6 bands from MON4000 range	12 V DC, Both Rx active	15 W
Typical noise figure	< 6 dB up to 3 GHz < 8 dB above 3 GHz	PoE+ 53 V, Idle	8 W
Temperature range	-10°C to +40°C	PoE+ 53 V, Both Rx active	18 W
Weight	1.1 kg	Internal reference stability	0.25 ppm free running
Safety certification	EN 60950-1:2006/ A11:2009/A1:2010/ A12:2011/A2:2013	10 MHz reference input	> -6 dBm sinewave or 5 V square wave
		10 MHz reference output	> -2 dBm sinewave
		Dimensions (w x d x h)	210 × 115 × 45 mm
		EMC certification	EN 61326-1:2013



Multiple Access Communications Limited  
Delta House, Southampton Science Park  
Southampton, SO16 7NS  
United Kingdom

web: [www.mac ltd.com](http://www.mac ltd.com) | e-mail: [enquiries@mac ltd.com](mailto:enquiries@mac ltd.com) | tel: +44 23 8076 7808

Copyright © 2018-2019 Multiple Access Communications Limited. All rights reserved.